

# Series 8800 Pump

Model: 88XX-2X03-B594

Flow Range: Open Flow = 1.89-2.35 LPM

At 80 PSI = .83-1.51 LPM

## COMPLETING THE PART NUMBER:

88XX-2X03-B594

Steel Mounting Plate (Other Types Available)

See Performance Data for Recommended By-pass Pressure and Code


By-Pass Pressure Relief Control Valve

Select Pumphead Model From Performance Data Chart

3 = Open Ports for 3/8" Compression Fitting

4 = Push to Connect Ports for 1/4" Tubing

5 = Push-to-Connect Ports for 3/8" Tubing

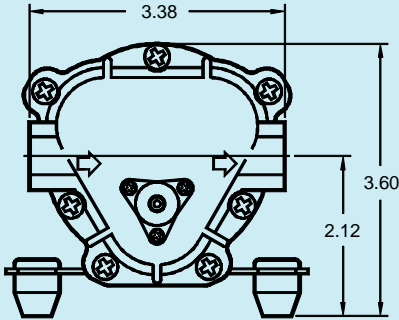

## SPECIFICATIONS:

### ■ MOTOR:

TYPE:

24 VDC, Permanent Magnet,  
Totally Enclosed, Non-Ventilated

LEADS:

14 AWG, 12" LONG

TEMP. LIMITS:

For User Safety, Optimal Performance, and Maximum Motor Life, This Motor is Equipped with a Thermal Protector that Limits the Motor Shell Temperature to 145°F (63°C), as Shown on the Heat Rise Graph.

DUTY CYCLE:

See Heat Rise Graph

### ■ PUMP DESIGN:

3 Chamber Diaphragm Pump, Self Priming,  
Capable of Being Run Dry

### ■ TYPICAL APPLICATION:

Pre-Filter Water Treatment (R.O. Boost)

### ■ MATERIALS:

HOUSINGS:

Nylon

VALVES:

EPDM

DIAPHRAGM:

Santoprene

FASTENERS:

Stainless Steel

### ■ LIQUID TEMPERATURE:

170°F (77°C) Max.

### ■ PUMP CERTIFICATIONS:


NSF Standard 58

### ■ PRIMING CAPABILITIES:

	88X0	88X1	88X2
PRIME (FEET)	5	6	7

### ■ FITTINGS:

TYPE	SHAPE	KIT NO.	CONNECTS TO...
3/8" COMPRESSION	STRAIGHT	25-145	3/8" TUBING
3/8" COMPRESSION	ELBOW	25-146	3/8" TUBING
3/8" STEM	STRAIGHT	25-144	3/8" JOHN GUEST PUSH-ON FITTING

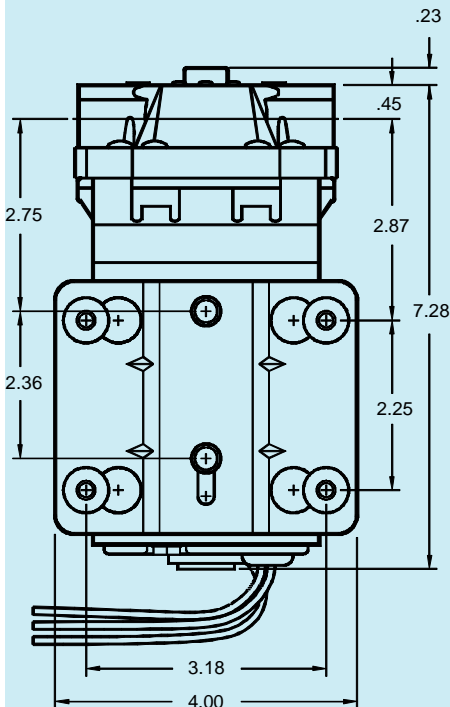

WEIGHT: 6 lbs.



Aquatec Water Systems, Inc.  
17422 Pullman  
Irvine, CA 92614  
Sales: 949-225-2200  
Fax: 949-225-2222

DOCUMENT:  
ISSUED:  
REVISED:

DS88XX-2X03-B594  
12/18/00  
12/18/00


# Series 8800 Pump

Model: 88XX-2X03-B594

PERFORMANCE DATA								
DISCHARGE PRESSURE (PSI)	PUMP HEAD MODEL						RECOMMENDED BY-PASS PRESSURE	
	88X0		88X1		88X2		PSI	CODE
	FLOW (LPM)	CURRENT (AMPS)	FLOW (LPM)	CURRENT (AMPS)	FLOW (LPM)	CURRENT (AMPS)		
80	0.83	0.92	1.14	0.99	1.51	1.24	110	J
70	1.14	0.85	1.25	0.90	1.63	1.13	100	I
60	1.25	0.77	1.36	0.83	1.74	1.02	90	H
50	1.32	0.70	1.40	0.74	1.85	0.91	80	G
40	1.40	0.62	1.48	0.65	1.89	0.79	70	F
30	1.48	0.53	1.51	0.56	1.97	0.68	70	F
20	1.59	0.45	1.63	0.47	2.12	0.55	70	F
10	1.70	0.35	1.78	0.37	2.27	0.41	70	F
OPEN	1.89	0.32	1.93	0.34	2.35	0.38	70	F

PERFORMANCE MEASURED WITH FLOODED INLET (0 PSI), 70°F (21°C) AMBIENT AND WATER TEMPERATURE, AND VOLTAGE CONTROLLED AT 24 VDC. POSITIVE INLET PRESSURE WILL INCREASE THE DISCHARGE PRESSURE BY A SIMILAR AMOUNT, FOR A GIVEN FLOW. MAXIMUM INLET PRESSURE IS 60 PSI.

SHADED AREA DENOTES CONTINUOUS OPERATION CAPABILITY AT DESIGNATED PRESSURE AND CURRENT.

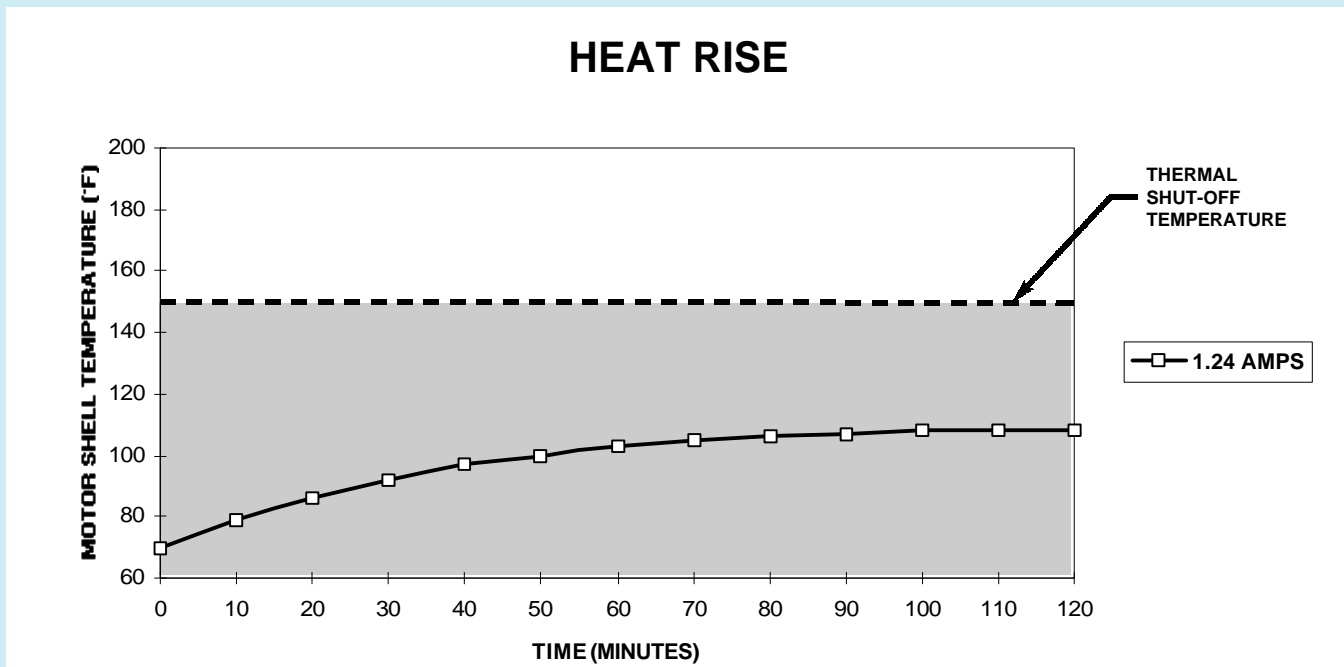

All of the pump models in the Performance Data and Heat Rise charts are in the shaded area, meaning they are capable of sustaining continual running, at any of the above listed pressures, without shutting down to allow the motor to cool. To conserve wearing parts, however, the pump should only operate as needed.

ALL PERFORMANCE AND HEAT RISE FIGURES ARE APPROXIMATE. ACTUAL VALUES WILL VARY WITH AMBIENT CONDITIONS.