
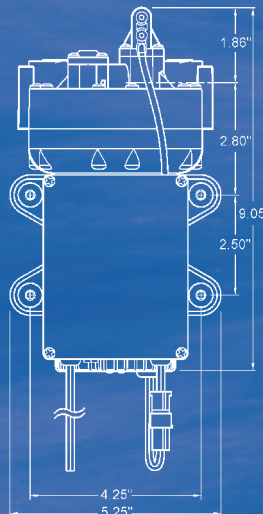

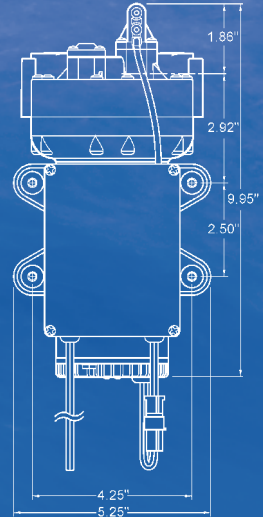



AQUAJET RV

PERFORMANCE DATA				
DISCHARGE PRESSURE		FLOW		CURRENT
(PSI)	(BAR)	(GPM)	(LPM)	(AMPS)
65	4.4	0.70	2.65	10.00
60	4.0	1.00	3.78	10.00
50	3.4	1.50	5.78	10.00
40	2.7	2.20	8.32	10.00
30	2.0	2.80	10.50	10.00
20	1.4	3.80	14.36	9.70
10	0.7	4.50	17.01	8.40
OPEN	OPEN	5.00	18.90	7.20


IDENTIFYING THE PART NUMBER:

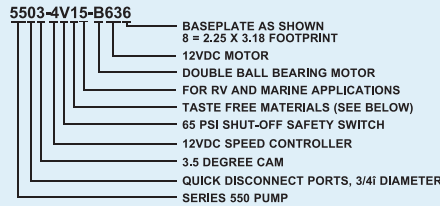

AQUAJET ES

PERFORMANCE DATA				
DISCHARGE PRESSURE		FLOW		CURRENT
(PSI)	(BAR)	(GPM)	(LPM)	(AMPS)
65	4.4	0.60	2.27	6.50
60	4.0	0.70	2.65	6.50
50	3.4	1.00	3.78	6.50
40	2.7	1.60	6.05	6.50
30	2.0	2.30	8.70	6.50
20	1.4	2.70	10.22	5.80
10	0.7	3.00	11.35	4.60
OPEN	OPEN	3.40	12.87	3.60

IDENTIFYING THE PART NUMBER:

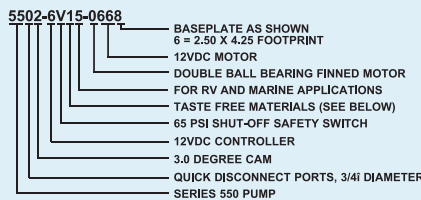

TECHNICAL SPECIFICATIONS:

MOTOR:

- TYPE: 12VDC, permanent magnet, totally enclosed, non-ventilated
- LEADS: 14 AWG, 12" long, Black negative, Red positive.

**TO AVOID PERMANENT ELECTRONIC DAMAGE,
DO NOT REVERSE POLARITY.**

SPEED CONTROLLER:

Factory set to approximately 10 Amps Max. Thermally protected to avoid component damage. Will reset automatically.

CAUTION:

Exterior surfaces (heat sink), may exceed 150°F after only 15 minutes of operation.

COMPONENT MATERIALS:

- PUMP HOUSINGS: Polypropylene
- CONTROLLER HOUSING: Nylon
- VALVES: EPDM
- DIAPHRAGM: Santoprene
- FASTENERS: Stainless Steel

LIQUID TEMPERATURE: 140°F (60°C) Max.

PUMP CERTIFICATIONS: IAPMO, NSF

PRIMING CAPABILITIES: 13 Feet

FITTINGS:

TYPE	SHAPE	HOSE BARB SIZE		
		1/2"	5/8"	3/4"
HOSE BARB	STRAIGHT	QBS-554	QBS-555	QBS-556
HOSE BARB	ELBOW	QBE-554	QBE-555	QBE-556